





# **5-Port Gigabit GREENnet Switch** TEG-S50g (V1.0R)

The compact 5-Port Gigabit GREENnet Switch provides high bandwidth performance, ease of use and reliability, all while reducing power consumption by up to 70%.

GREENnet technology automatically adjusts power voltage as needed, resulting in substantial energy savings.

Boost your office efficiency and eliminate network congestion with Gigabit speeds and total switching capacity of 10Gbps with Full-Duplex Mode. Plug and Play this sturdy metal switch for reliable high-speed network connectivity.

#### **FEATURES** • 5 x 10/100/1000Mbps Auto-Negotiation, Auto-MDIX Gigabit Ethernet ports

- GREENnet technology reduces power consumption when:
  - a. Ethernet port is not in use
  - b. Connected device is turned off
  - c. Connected device is in power-saving mode
  - d. Based on Ethernet cable length
- · Store-and-Forward switching architecture with non-blocking wire-speed performance
- IEEE 802.3x Flow Control for full-duplex mode
- · Back pressure Flow Control for half-duplex mode
- Integrated address look-up engine with 4K absolute MAC address table and 104KBytes RAM data buffering
- · Operates and maximizes packet filtering and forwarding rate
- Jumbo Frame support up to 12KBytes
- · Sturdy metal housing
- Diagnostic LEDs and Plug & Play
- 5 year limited warranty




### SPECIFICATIONS

Hardware	
Standards	• IEEE 802.3 10Base-T; IEEE 802.3u 100Base-TX
	IEEE 802.3ab 1000Base-T; IEEE 802.3x Flow Control
Network Media	Ethernet: Cat. 3,4,5, up to 100m     Fast Ethernet: Cat. 5, up to 100m     Gigabit Ethernet: Cat. 5, 5e,6, up to 100m
Data Rate	<ul> <li>Ethernet: 10Mbps/20Mbps (half/full-duplex)</li> <li>Fast Ethernet: 100Mbps/200Mbps (half/full-duplex)</li> <li>Gigabit Ethernet: 2000Mbps (full-duplex)</li> </ul>
Protocol / Topology	CSMA/CD, Star
Power Consumption	• 3.67w (max)
Switch Fabric	10Gbps forwarding capacity
Interface	<ul> <li>5 x 10/100/1000Mbps Auto-MDIX RJ-45 ports</li> </ul>
Data RAM Buffer	• 104Kbits
Filtering Table	4K entries
Diagnostic LED	Power, Link/ACT, 100Mbps, 1000Mbps
Power Adapter	7.5V DC, 1A external power adapter
Dimension	• 171 x 98 x 28mm (6.7 x 3.86 x 1.1 in)
Weight	• 430g (15.2oz)
Temperature	<ul> <li>Operating: 0° ~ 40° C (32° ~ 104° F)</li> <li>Storage: -10° ~ 70° C (14° ~ 158° F)</li> </ul>
Humidity	• 5%~90% (non-condensing)
Certifications	• FCC, CE

\*Max power savings compared with standard TRENDnet switches.

## NETWORKING SOLUTIONS

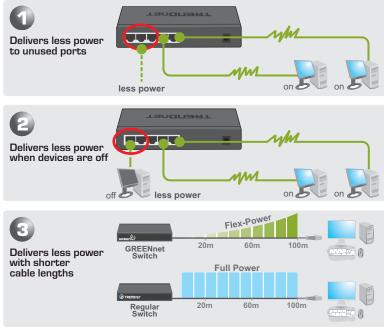

\*Max power savings compared with standard TRENDnet switches.

# PACKAGE CONTENTS

• TEG-S50g

Multi-Language Quick Installation Guide

### **RELATED PRODUCTS**

TEW-672GR	300Mbps Dual Band Wireless N Gigabit Router
	1
TEG-PCBUSR	10/100/1000Mbps Gigabit CardBus PC Card
TEG-PCITXR	10/100/1000Mbps Gigabit PCI Adapter
TEG-S80g	8-Port Gigabit GREENnet Switch

### ORDERING INFORMATION

#### TRENDNET

20675 Manhattan Place,Torrance, CA 90501 USA Tel: 1-310-961-5500 Fax: 1-310-961-5511 Web: <u>www.trendnet.com</u> Email: sales@trendnet.com

To Order Please Call: 1-888-326-6061

